


MYBOOST INSULATED COMPACT COLD WATER BOOSTER SET

Our bespoke in-tank booster sets are custom-designed for space-saving solutions. Featuring submersible pumps inside the tank, controlled by variable speed drives (VSDs), they offer efficient, reliable performance, making them ideal for light commercial and commercial applications with consistent water pressure in compact spaces.. Thermosure is an advanced thermo-retentive material made from bonded multi-polymers, rigorously tested under real-world and simulated conditions to maintain resistance against sub-zero temperatures. Each tank chamber undergoes a meticulous three-shot moulding process, ensuring uniform thickness and optimal thermal properties.



PRODUCT CODE STRUCTURE

MYBOOST 2IC 40-20 11

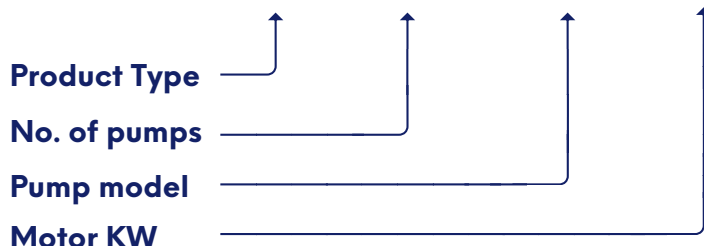

PRODUCT FEATURES



Space-Efficient Design: Compact units that fit into tight spaces without compromising performance.



WRAS-Approved Submersible Pumps: High-quality, reliable pumps that meet industry standards.



Versatile Tank Capacities: Ranging from 1000 litres to 6000 litres, suitable for various commercial needs.



Bluetooth Connectivity: Easy pairing of inverters for duty assist functionality, eliminating the need for complex wiring.



Simplified Installation: Independent inverter system allows for straightforward installation and testing, reducing setup time and costs.



Reliable Water Pressure: Maintains consistent and stable water pressure, ensuring optimal system performance.



Enhanced Water Pressure: Ensures consistent, reliable water pressure for optimal system performance.



High efficiency: Reducing operational costs while maintaining optimal performance.

**WRAS approved
expansion
vessel**

**Variable speed
inverter**

**Stainless Steel
Manifolds**

**Submersible
multistage pump
inside a Insulated
MDPE tank**

DESCRIPTION	VALUES
FLOW RANGE (SINGLE PUMP)	1.3 - 2.2 litres/sec
FLOW RANGE (TWIN PUMP)	2.6 - 4.4 litres/sec
PRESSURE RANGE	2.5 - 8 bar
MAX SYSTEM PRESSURE	10 bar
MAX SYSTEM TEMPERATURE	23°C
INLET SIZE	22mm - 28mm BSP
OUTLET SIZE	1" or 1¼" BSP
POWER SUPPLY	230 / 1 / 50
CONTROL TYPE	Wireless Bluetooth Technology
TANK CONSTRUCTION	25mm insulated GRP
PUMPS	AISI 304 stainless steel

NOMINAL CAPACITY (L)	ACTUAL CAPACITY (L)	PUMP CONFIGURATION	INLET SIZE (MM)	DIAMETER (MM)	HEIGHT (MM)
200	150	SINGLE	15	610	1175
300	250	SINGLE	15	690	1515